

Map Direct Input Feature to Button (Including Meta Option)




Read [Using Program Buttons](#) to know how to use Program Buttons.

Direct Input

When you want to map a specific keycode, you can use the Direct Input function in the Program Buttons.

Select the Direct Input among the function list, and tap **OK**. Then a input dialog as below pops up.

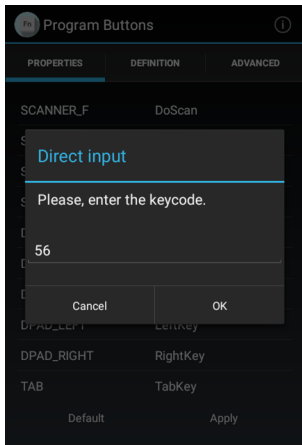

Enter the keycode referring to [Android Developer Site](#) (see **Constant Value** of each keycode).

Best Practice

For example, let's make the '.' (dot) key to enter the ',' (comma).

1. Select **PERIOD** from the button list, and tap **Direct input**.
2. Find the KEYCODE_COMMA, 55, from Android Developer Site.
3. Enter 55 to the input field, and tap **OK**.
4. Tap **Apply** to save the changes.

After saving the changes, the ',' (comma) is entered when you press the '.' dot key.

Meta Option

From the following versions, a meta option has been added.
You can map the keycode combination with Control or Shift key using Meta option.


Applies To

| | | |
|------------|-------|-------------------------------|
| Android 9 | PM45 | 45.78 (May 31 2023) and later |
| | PM85 | 85.28 (May 31 2023) and later |
| | PM90 | 90.13 (Aug 30 2022) and later |
| | PM451 | 41.09 (Mar 28 2023) and later |
| Android 10 | PM30 | 30.04 (Nov 11 2022) and later |
| Android 11 | PM90 | 90.52 (Oct 21 2022) and later |
| | PM451 | 41.52 (Nov 18 2022) and later |
| | PM67 | 67.04 (Nov 18 2022) and later |
| | PM75 | 75.05 (Jul 14 2023) and later |
| | PM351 | 35.02 (Mar 15 2023) and later |

And other versions of models released after May 2023.

Meta option will be applied to the models running with Android 9 and above.

When you select the Direct Input, a dialog as below will be displayed.

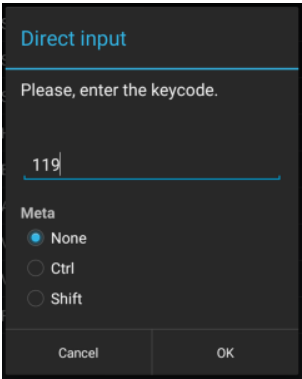

Enter the keycode referring to [Android Developer Site](#) (see **Constant Value** of each keycode), first.
And select an option that you want to combine with the keycode between None, Ctrl, and Shift.

RELATED ARTICLES

- Map Other Functions to the Navigation Bar Buttons
- Avoid Entering Sleep Mode with Power Button
- Lock Touch Screen Input
- Set Key Macro in Program Buttons
- Using Program Buttons